



DATE: 02 April 2012

I.T.L. (PRODUCT TESTING) LTD.

**CE EMC Test Report
(R&TTE Directive)**


for


Globisens Ltd.


Equipment under test:

Wireless Data Logger

Labdisc Gensci

Written by: 
Y. Raz, Documentation

Approved by: 
D. Yadidi, Test Engineer

Approved by: 
I. Raz, EMC Laboratory Manager

This report must not be reproduced, except in full, without the written permission of I.T.L. (Product Testing) Ltd. This report relates only to items tested.



TABLE OF CONTENTS

| | | |
|------------|--|-----------|
| 1. | GENERAL INFORMATION ----- | 3 |
| 1.1 | Administrative Information..... | 3 |
| 1.2 | Abbreviations and Symbols..... | 4 |
| 1.3 | List of Accreditations | 5 |
| 2. | APPLICABLE DOCUMENTS ----- | 6 |
| 2.1 | Location:..... | 7 |
| 2.2 | Open Site: | 7 |
| 2.3 | Ground Plane: | 7 |
| 2.4 | Antenna Mast: | 7 |
| 2.5 | Turntable: | 7 |
| 2.6 | EMI Receiver:..... | 7 |
| 2.7 | E.U.T. Support:..... | 7 |
| 2.8 | Test Equipment: | 7 |
| 3. | SUMMARY OF TEST RESULTS----- | 8 |
| 4. | EQUIPMENT UNDER TEST (E.U.T.) DESCRIPTION ----- | 9 |
| 5. | LIST OF TEST EQUIPMENT----- | 10 |
| 5.1 | Immunity Tests..... | 10 |
| 6. | E.U.T. PERFORMANCE VERIFICATION ----- | 11 |
| 6.1 | Mode of Operation..... | 11 |
| 6.2 | Monitoring of E.U.T. | 11 |
| 6.3 | Definition of Failure | 11 |
| 7. | IMMUNITY TO ELECTROSTATIC DISCHARGE ----- | 12 |
| 7.1 | Test Specification..... | 12 |
| 7.2 | Test Procedure..... | 12 |
| 7.3 | Test Results | 12 |
| 8. | IMMUNITY TO RADIATED FIELD ----- | 19 |
| 8.1 | Test Specification..... | 19 |
| 8.2 | Test Procedure..... | 19 |
| 8.3 | Test Results | 19 |
| 9. | SET UP PHOTOGRAPHS ----- | 21 |
| 10. | SIGNATURES OF THE E.U.T'S TEST ENGINEERS ----- | 22 |



1. General Information

1.1 Administrative Information

| | |
|--------------------------------|--|
| Manufacturer: | Globisens Ltd. |
| Manufacturer's Address: | 38 Haperachim St., Raanana, 43399, Israel Tel: +972-9-7740257 |
| Manufacturer's Representative: | Dov Bruker |
| Equipment Under Test (E.U.T): | Wireless Data Logger |
| Equipment Model No.: | Labdisc Gensci |
| Equipment Serial No.: | 20111109943 |
| Date of Receipt of E.U.T: | 11/03/12 |
| Start of Test: | 11/03/12 |
| End of Test: | 12/03/12 |
| Test Laboratory Location: | I.T.L (Product Testing) Ltd. 1 Batsheva St., Lod ISRAEL 71100 |
| Test Specifications: | See Section 2 |

1.2 Abbreviations and Symbols

The following abbreviations and symbols are applicable to this test report:

| | |
|--------------|---|
| A/m | ampere per meter |
| AC | alternating current |
| AM | amplitude modulation |
| ARA | Antenna Research Associates |
| Aux | auxiliary |
| Avg | average |
| CDN | coupling-decoupling network |
| cm | centimeter |
| dB | decibel |
| dBm | decibel referred to one milliwatt |
| db μ V | decibel referred to one microvolt |
| db μ V/m | decibel referred to one microvolt per meter |
| DC | direct current |
| EFT/B | electrical fast transient/burst |
| EMC | electromagnetic compatibility |
| ESD | electrostatic discharge |
| E.U.T. | equipment under test |
| GHz | gigahertz |
| HP | Hewlett Packard |
| Hz | Hertz |
| kHz | kilohertz |
| kV | kilovolt |
| LED | light emitting diode |
| LISN | line impedance stabilization network |
| m | meter |
| mHn | millihenry |
| MHz | megahertz |
| msec | millisecond |
| N/A | not applicable |
| per | period |
| QP | quasi-peak |
| PC | personal computer |
| RF | radio frequency |
| RE | radiated emission |
| sec | second |
| V | volt |
| V/m | volt per meter |
| VRMS | volts root mean square |



1.3 List of Accreditations

The EMC laboratory of I.T.L. is accredited by the following bodies:

1. The American Association for Laboratory Accreditation (A2LA) (U.S.A.), Certificate No. 1152.01.
2. The Federal Communications Commission (FCC) (U.S.A.), Registration No. 861911.
3. The Israel Ministry of the Environment (Israel), Registration No. 1104/01.
4. The Voluntary Control Council for Interference by Information Technology Equipment (VCCI) (Japan), Registration Numbers: C-3006, R-2729, T-1877, G-245.
5. Industry Canada (Canada), File No. IC 6183.
6. TUV Product Services, England, ASLLAS No. 97201.

I.T.L. Product Testing Ltd. is accredited by the American Association for Laboratory Accreditation (A2LA) and the results shown in this test report have been determined in accordance with I.T.L.'s terms of accreditation unless stated otherwise in the report.

2. Applicable Documents

- 2.1 **R&TTE Directive: 1999** *DIRECTIVE 1999/5/EC OF THE EUROPEAN PARLIAMENT AND OF THE COUNCIL of 9 March 1999 on radio equipment and telecommunications terminal equipment and the mutual recognition of their conformity*
- 2.2 **EN 301 489-1 V1.8.1: 2008** *Electromagnetic compatibility and Radio spectrum Matters (ERM); ElectroMagnetic Compatibility (EMC) standard for radio equipment and services; Part 1: Common technical requirements*
- 2.3 **EN 301 489-3 V1.4.1: 2002** *Electromagnetic compatibility and Radio spectrum Matters (ERM); ElectroMagnetic Compatibility (EMC) standard for radio equipment and services; Part 3: Specific conditions for Short-Range Devices (SRD) operating on frequencies between 9 kHz and 40 GHz*
- 2.4 **EN 61000-4-2: 2001** *Electromagnetic Compatibility (EMC), Part 4: Testing and Measurement Techniques; Section 2: Electrostatic discharge immunity test: Basic EMC publication.*
- 2.5 **EN 61000-4-3: 2006** *Electromagnetic Compatibility (EMC), Part 4: Testing and Measurement Techniques; Section 3: Radiated, radio frequency, electromagnetic field immunity test.*



Test Site Description

2.1 Location:

The Electromagnetic Compatibility Test Facility of I.T.L. (Product testing) Ltd. Is located at
Telrad Industrial Park, Lod, 71100 Israel.
Telephone: +972-8-9153100
Fax: +972-8-9153101

2.2 Open Site:

The OATS is located on a one floor-building roof. The OATS consists of 3 meter and 10 meter ranges, using a 21.5m X 8.5m solid metal ground plane, a remote controlled turntable and an antenna mast.

2.3 Ground Plane:

The ground plane is made from steel plates, which are welded continuously together. The Ground plane is lies and welded on welded steel construction with vias to allow for water drainage.

All the power, control, and signal lines to the turntable and the 3 m and 10m antenna mast outlets are routed in shielded conduits under the plane to the control building.

2.4 Antenna Mast:

ETS model 2070-2. The antenna position and polarization are remote controlled via Fiber Optical Link using ETS/EMCO Dual Controller Type 2090. The antenna position is adjustable between 1-4 meters. Pressurized air is used to power changing the polarity of the antenna.

2.5 Turntable:

ETS model 2087 series. The position of the turntable is remote-controlled via Fiber Optic Link, using ETS/EMCO Dual Controller Type 2090. The turntable is mounted in a pit and its surface is flush with the Open Site Ground Plane. Brushes near the periphery of the turntable ensure good conductive connection to the ground plane. The Turntable maximum load is 1250 Kg.

2.6 EMI Receiver:

Type HP8542E, including HP85420E R.F. filter manufactured by Hewlett-Packard, being in full compliance with CISPR 16 requirements.

2.7 E.U.T. Support:

Table mounted E.U.T.s are supported during testing on 80 cm high all-wooden tables (no metal nails or screws).

2.8 Test Equipment:

See details in Section 6.

3. Summary of Test Results

| Test | Results |
|---|---|
| <p>ESD EN 61000-4-2: 2001 Air Discharge, 8kV Contact Discharge, 4kV</p> | <p>The E.U.T met the performance requirements of the specification.</p> |
| <p>Radiated Immunity EN 61000-4-3: 2006 (80-1000; 1400-2700 MHz) 3 V/m, 80% A.M. by 1kHz</p> | <p>The E.U.T met the performance requirements of the specification.</p> |



4. Equipment Under Test (E.U.T.) Description

The Labdisc places an advanced science lab into the hands of young scientists. The Labdisc is the only solution for K-12 science with up to 12 wireless sensors built into a single compact device - revolutionizing science in terms of convenience, cost and portability.

The Labdisc wireless advantage means much more than just a cable-free, clean working environment, safe from hazardous materials. A single wireless transmission from the Labdisc for up to 12 sensors reduces radio interference in the classroom, while eliminating the need for costly transmitters built into every sensor.

The compact Labdisc carries key features such as display, keypad, memory and battery to ensure full autonomic data collection, independent of a computer. As a result the Labdisc keeps science cost effective, and free from computing issues such as availability or, during field experiments, hard to read screens in direct sunlight. Additionally, in the laboratory, the Labdisc can operate as a sensor interface, transmitting online measurements to the computer.

5. List of Test Equipment

5.1 Immunity Tests

Equipment indicated below by an "X" used in Tests IEC 61000-4:-2,-3,-4,-5,-6,-8,-11.

Test equipment calibration is in accordance with ITL Q.A. Procedure PM 110, "Calibration Control Procedure", which complies with ISO 9002 and ISO/IEC Guide 17025.

| Instrument | Manuf. | Model | Serial No. | Used in Test IEC 61000-4: | | | | | | |
|----------------------------------|--------------|----------------------|------------|---------------------------|----|----|----|----|----|-----|
| | | | | -2 | -3 | -4 | -5 | -6 | -8 | -11 |
| Transient Generator | KeyTek | CEMASTER | 9612436 | | | | | | | |
| ESD Simulator | CDI | ESD 2000i | 426 | X | | | | | | |
| Isotropic Field Probe | AR | EP-2080 | 23190 | | X | | | | | |
| RF Amplifier | AR | 100W1000M1 | 19842 | | X | | | | | |
| Isotropic Field Monitor | AR | FM-2000 | 19719 | | X | | | | | |
| Biconilog Antenna | EMCO | 3142B | 1078 | | X | | | | | |
| Horn Antenna | A.H. systems | SAS 200/571 | 199 | | X | | | | | |
| RF Amplifier | OPHIR | 5303081 | 1002 | | X | | | | | |
| RF Amplifier | IFI | SMX100 | 1194-4537 | | X | | | | | |
| RF Amplifier | IFI | M100 | M612-0208 | | X | | | | | |
| Signal Generator | HP | 8657A | 2849U01094 | | X | | | | | |
| BulkF Current Probe | FCC | F-120-9 | 105 | | | | | | | |
| CDN | FCC | FCC-801-M3-16A | 9962 | | | | | | | |
| Transient Wave- form Monitor | CDI | TWM-100 | 3233 | | | | | | | |
| Phase Control Amplifier | CDI | PCA-1000 | 3217 | | | | | | | |
| Single Phase Isolated Backfilter | CDI | CDI-1kVA | 3221 | | | | | | | |
| Surge Generator | CDI | CDI-1000i | 3153 | | | | | | | |
| 1.2/50; 8/20usec AC Surge Unit | KeyTek | E551 | 9512398 | | | | | | | |
| Surge Generator | EM TEST | UCS 500-M | 1198-45 | | | | | | | |
| AC Power Source | EM TEST | UCS 500-M | 1198-45 | | | | | | | |
| Current Generator | FCC | F-1000-4-8-125A | 9838 | | | | | | | |
| Magnetic Loop | FCC | F-1000-4-8/9/10-L-1M | 9836 | | | | | | | |

6. E.U.T. Performance Verification

6.1 Mode of Operation

The E.U.T. was operated measuring room humidity and transmitting at 2.4 GHz to the auxiliary spectrum analyzer. The humidity measurement was updated every second.

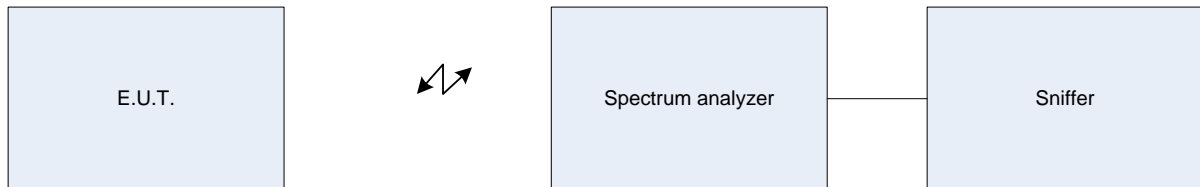


Figure 1. Test Set-up

6.2 Monitoring of E.U.T.

The transmission was monitored on the display of the auxiliary spectrum analyzer
The updating of the humidity measurement was observed on the E.U.T. LCD display.

6.3 Definition of Failure

1. Transmission stops.
2. Updating of the humidity measurement stops and E.U.T. turns off.

7. Immunity to Electrostatic Discharge

7.1 Test Specification

EN 61000-4-2: 2001

7.2 Test Procedure

In the case of tabletop equipment, the E.U.T. was set up on a wooden table 0.8m high on an insulating support 0.5 mm thick above the reference ground plane. In the case of floor-standing equipment, the EUT and cables were set up on an insulating support 0.1m above the reference plane. The test setup is illustrated in the photograph, *Figure 9. Immunity to Electrostatic Discharge Test.*

Photographs in *Figure 2 to Figure 7* show the locations of test points.

7.2.1 Air Discharge

Potentials of 2, 4 and 8 kV were applied near each applicable test point. At places where discharge occurred, the potential was applied twenty times; ten times negative and ten times positive. The E.U.T.'s performance during the test was verified as detailed in Section 7.

7.2.2 Contact Discharge

Potentials of 2 and 4 kV were applied to each applicable test point. In places where discharge occurred, the potential was then applied twenty times; ten negative and ten positive discharges. The E.U.T.'s performance during the test was verified as detailed in Section 7.

7.2.3 Indirect Discharge (vertical and horizontal coupling plane)

Potentials of 2 and 4 kV were applied to the center of the vertical edge of the coupling plane at a distance of 0.1 meters from the outer casing of the E.U.T. to each applicable test point.

The potential was applied 10 times for each polarity, to each location of the coupling plane. All four faces of the E.U.T. were completely illuminated.

An ESD of the same characteristics as for the vertical coupling plane was applied to the horizontal coupling plane, at each side of the E.U.T., at a distance of 0.1 meter from its outer casing.

Additional details are shown in Figure 5 of EN 61000-4-2: 2001.

The E.U.T.'s performance during the test was verified as detailed in Section 7.

7.3 Test Results

The E.U.T met the requirements of specification EN 61000-4-2: 2001.

Immunity to Electrostatic Discharge

E.U.T Description Wireless Data Logger
Type Labdisc Gensci
Serial Number: 20111109943

Specification: EN 61000-4-2: 2001

AIR: ●



Figure 2. ESD Test Points

Immunity to Electrostatic Discharge

E.U.T Description Wireless Data Logger
Type Labdisc Gensci
Serial Number: 20111109943

Specification: EN 61000-4-2: 2001

Contact:

AIR: ●

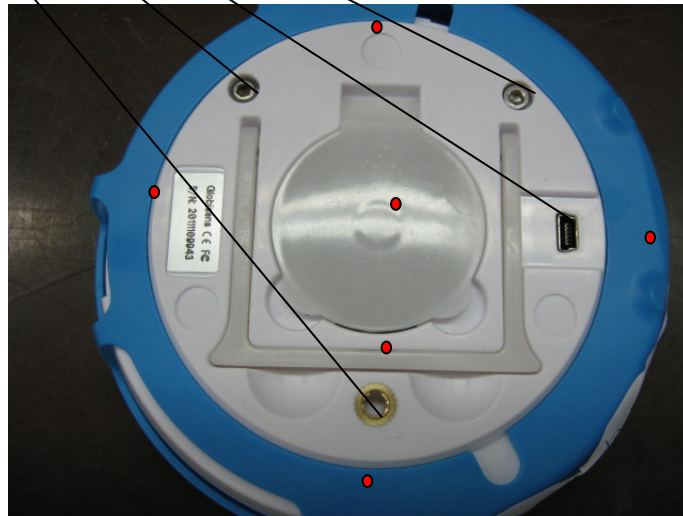


Figure 3. ESD Test Points

Immunity to Electrostatic Discharge

E.U.T Description Wireless Data Logger
Type Labdisc Gensci
Serial Number: 20111109943

Specification: EN 61000-4-2: 2001

AIR: ●

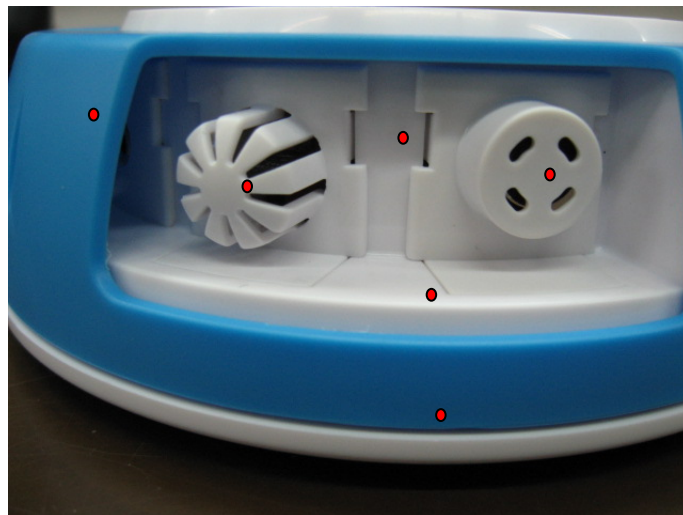


Figure 4. ESD Test Points

Immunity to Electrostatic Discharge

E.U.T Description Wireless Data Logger
Type Labdisc Gensci
Serial Number: 20111109943

Specification: EN 61000-4-2: 2001

Contact:

AIR: ●

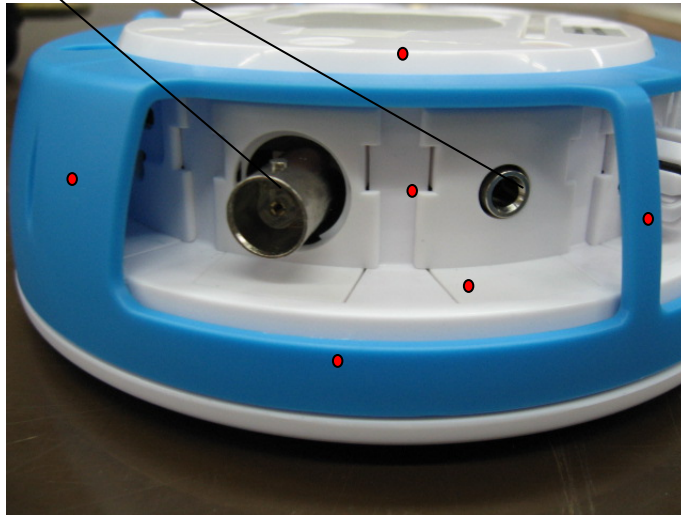


Figure 5. ESD Test Points

Immunity to Electrostatic Discharge

| | |
|-------------------|----------------------|
| E.U.T Description | Wireless Data Logger |
| Type | Labdisc Gensci |
| Serial Number: | 20111109943 |

Specification: EN 61000-4-2: 2001

Contact:

AIR: ●

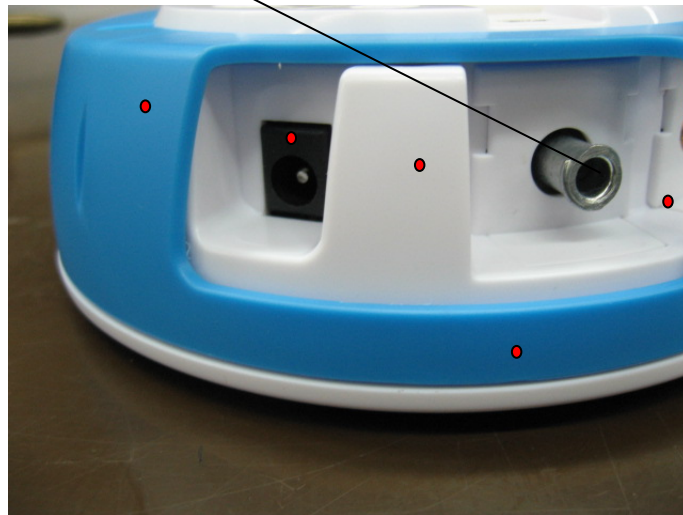


Figure 6. ESD Test Points

Immunity to Electrostatic Discharge

E.U.T Description Wireless Data Logger
Type Labdisc Gensci
Serial Number: 20111109943

Specification: EN 61000-4-2: 2001

Contact:

AIR: ●

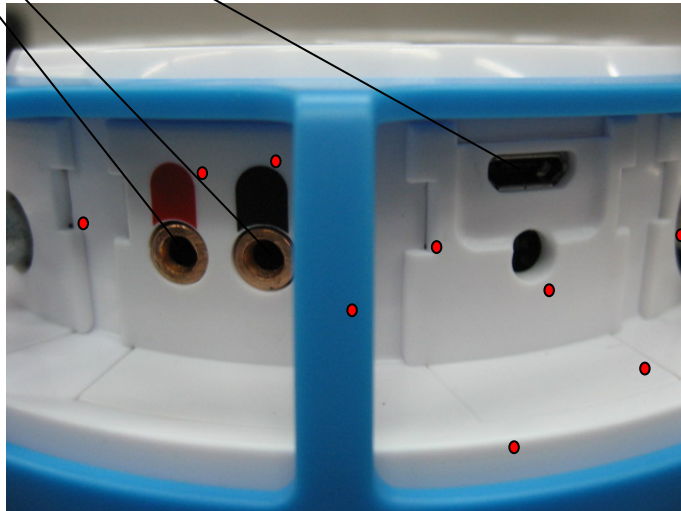


Figure 7. ESD Test Points

8. Immunity to Radiated Field

8.1 Test Specification

EN 61000-4-3: 2006

8.2 Test Procedure

The E.U.T. was subjected to a field of 3V/m, amplitude modulated 80% by a 1kHz sinusoidal signal.

The Radiated Field was applied in vertical and horizontal polarization using Biconilog Periodical antenna in the frequency range of 80-1000, 1400-2000 MHz and horn antennas in the frequency range of 2000 – 2700 MHz.

The Radiated Field was calibrated and tested for uniformity in accordance with Section 6.2 of IEC 61000-4-3.

The calibration values for the driver signal generator were based on the data given in I.T.L. "Radiated Immunity Calibration Test Report" No. PM-112R-IMM.

The frequency was swept using discrete increments having a value less than 1% of the fundamental frequency.

The performance of the E.U.T. was verified during the test as described in Section 7.

The test setup is illustrated in the photograph, *Figure 10. Immunity to Radiated Field Test*.

Note: Opinion and Interpretation:

The most sensitive surface of the E.U.T. was fully tested.

The most sensitive E.U.T. surface was determined as follows:

A preliminary radiated emission test in the frequency range

80 – 1000 MHz was performed inside the semi-anechoic chamber using an E-field probe and spectrum analyzer. The surface having the maximum radiation level was selected as the most sensitive surface.

8.3 Test Results

The E.U.T. passed the Radiated Immunity Tests as required by specifications:
EN 61000-4-3: 2006.

For additional information see *Figure 8*.



Radiated Immunity

E.U.T Description Wireless Data Logger
Type Labdisc Gensci
Serial Number: 20111109943

| Specification: EN 61000-4-3: 2006 80-1000; 1400-2700 MHz | | | | | |
|--|-----------|------------------|---------------------|-------------|--------------------------|
| Amplitude Modulation: 80% AM by 1 kHz | | | | | |
| Frequency (MHz) | | Antenna Polarity | Specification (V/m) | PASS / FAIL | Immunity Threshold (V/m) |
| <u>From</u> | <u>To</u> | | | | |
| 80 | 1000 | Horizontal | 3.0 | Pass | |
| 80 | 1000 | Vertical | 3.0 | Pass | |
| 1400 | 2700 | Horizontal | 3.0 | Pass | |
| 1400 | 2700 | Vertical | 3.0 | Pass | |

Figure 8. Immunity to Radiated Field

9. Set Up Photographs





Figure 9. Immunity to Electrostatic Discharge Test



Figure 10. Immunity to Radiated Field Test



10. Signatures of the E.U.T's Test Engineers

| Test | Test Engineer Name | Signature | Date |
|-------------------|--------------------|--|----------|
| ESD | D. Yadidi |  | 02.04.12 |
| Radiated Immunity | D. Yadidi |  | 02.04.12 |